



# Apollo & Leto

## Wall-mount Installation Instructions

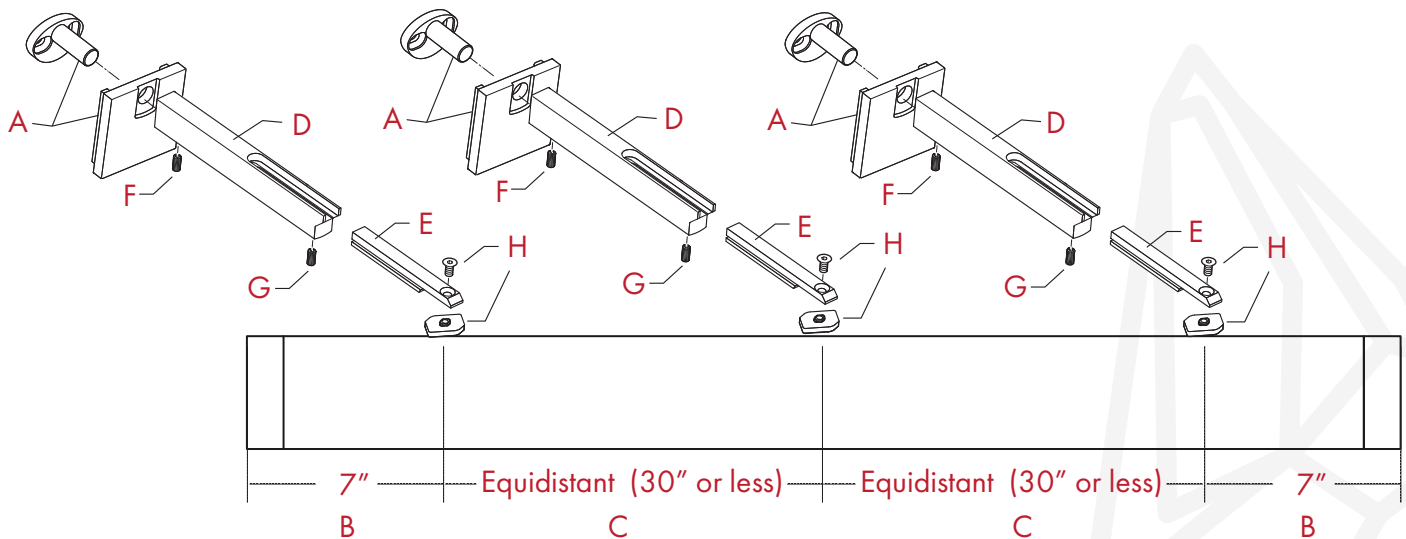

1. Install the wall mount brackets.
  - a. The base plate of the bracket is a 2-part piece. A base plate and a base plate cover. **A**
2. Install the base plates to the wall, with the top of the plate  $1 \frac{3}{8}$ " above the height of your drape. This will allow for a  $\frac{1}{8}$ " clearance from the bottom of the drape to the floor. Brackets should be installed 7" from each end **B** and equidistant between subsequent brackets. **C**
3. Place the base plate cover over the base plate.
4. Connect bracket arms **D & E** using screw **G**. Do not tighten yet. Slide plates **H** through the top of the rod. They will slide under motor mount and attach bracket arms **E** to the rod using screw **H**. Do not tighten yet.
5. Align the bracket arms **D** with the wall brackets **A** and slide the bracket arms into the base plates. Tighten set screws. **F & G**
6. Tighten screws at the top of the rail. **H**
7. Set screws **G** allow the adjustment of the distance of the motorized rod from the wall. Align all the brackets and then tighten all of the set screws.
8. Check to make sure all of the screws **F G & H** have been tightened.
9. You are now ready to install your favorite motor and set it's limits according to the manufacturers' instructions.

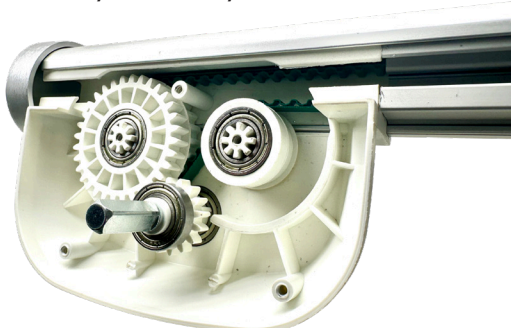

If your rod has a splice, remove the motor assembly cover plate and re-attach belt around gears before installing rod as per photo.